

06/27/00  
Jc845 U.S. PRO

06-28-00

A

DOCKET NO.: FL001

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re Application of:

Jeffrey C. Schroeder

Serial No.: To Be Assigned

Group Art Unit: N/A

Filing Date: Herewith – June 27, 2000

Examiner: N/A

For: **SYSTEM AND METHOD FOR INTEGRATING WEATHER DATA INTO  
TELEVISION BROADCASTS**

EXPRESS MAIL LABEL NO: EK719 005 202US  
DATE OF DEPOSIT: June 27, 2000

Box ☒ Patent Application  
☐ Provisional ☐ Design ☐ Sequence

Assistant Commissioner for Patents  
Washington DC 20231

Sir:

**PATENT APPLICATION TRANSMITTAL LETTER**

Transmitted herewith for filing, please find

☒ A Utility Patent Application under 37 C.F.R. 1.53(b).

It is a continuing application, as follows:

☐ continuation ☐ divisional ☐ continuation-in-part of prior application number  
\_\_\_\_\_/\_\_\_\_\_.

☐ A Provisional Patent Application under 37 C.F.R. 1.53(c).

☐ A Design Patent Application (submitted in duplicate).

Jc846 U.S. PRO  
09/604824  
06/27/00

09604824, 062700

Including the following

- ☐ Provisional Application Cover Sheet.
- ☒ New or Revised Specification, including pages 1 to 21 containing:
- ☒ Specification
  - ☒ Claims
  - ☒ Abstract
  - ☐ Substitute Specification, including Claims and Abstract.
- ☐ The present application is a continuation application of Application No. \_\_\_\_\_ filed \_\_\_\_\_. The present application includes the Specification of the parent application which has been revised in accordance with the amendments filed in the parent application. Since none of those amendments incorporate new matter into the parent application, the present revised Specification also does not include new matter.
- ☐ The present application is a continuation application of Application No. \_\_\_\_\_ filed \_\_\_\_\_, which in turn is a continuation-in-part of Application No. \_\_\_\_\_ filed \_\_\_\_\_. The present application includes the Specification of the parent application which has been revised in accordance with the amendments filed in the parent application. Although the amendments in the parent C-I-P application may have incorporated new matter, since those are the only revisions included in the present application, the present application includes no new matter in relation to the parent application.
- ☐ A copy of earlier application Serial No. \_\_\_\_\_ Filed \_\_\_\_\_ to which no new matter has been added TOGETHER WITH a copy of the executed oath or declaration for such earlier application and all drawings and appendices. Such earlier application is hereby incorporated into the present application by reference.
- ☒ Please enter the following amendment to the Specification under the Cross-Reference to Related Applications section (or create such a section) : "This Application is a ☐ continuation or ☐ divisional or ☒ claims benefit of U.S. Provisional Application Serial No. 60/197,704 filed April 18, 2000."
- ☐ Signed Statement attached deleting inventor(s) named in the prior application.
- ☐ A Preliminary Amendment.

002230 42840960

- ☒ 9 Sheets of ☒ Formal ☐ Informal Drawings.
- ☐ Petition to Accept Photographic Drawings.
- ☐ Petition Fee
- ☒ An ☐ Executed ☒ Unexecuted Declaration or Oath and Power of Attorney.
- ☐ An Associate Power of Attorney.
- ☐ An ☐ Executed ☐ Copy of Executed Assignment of the Invention to \_\_\_\_\_
- ☐ A Recordation Form Cover Sheet.
- ☐ Recordation Fee - \$40.00.
- ☐ The prior application is assigned of record to \_\_\_\_\_
- ☐ Priority is claimed under 35 U.S.C. § 119 of Patent Application No. \_\_\_\_\_ filed \_\_\_\_\_ in \_\_\_\_\_ (country).
- ☐ A Certified Copy of each of the above applications for which priority is claimed:
- ☐ is enclosed.
- ☐ has been filed in prior application Serial No. \_\_\_\_\_ filed \_\_\_\_\_.
- ☐ An ☐ Executed ☐ Unexecuted ☐ Copy of Earlier Statement Claiming Small Entity Status under 37 C.F.R. 1.9 and 1.27
- ☐ is enclosed.
- ☐ has been filed in prior application Serial No. \_\_\_\_\_ filed \_\_\_\_\_, said status is still proper and desired in present case.
- ☐ Diskette Containing DNA/Amino Acid Sequence Information.
- ☐ Statement to Support Submission of DNA/Amino Acid Sequence Information.
- ☐ The computer readable form in this application \_\_\_\_\_, is identical with that filed in Application Serial Number \_\_\_\_\_, filed \_\_\_\_\_. In accordance with 37 CFR 1.821(e), please use the ☐ first-filed, ☐ last-filed or ☐ only computer readable form filed in that application as the computer readable form for the instant application. It is understood that the Patent and Trademark Office will make the necessary change in application number and filing date for the computer readable form that will be used for the instant application. A paper copy of the Sequence Listing is ☐ included in the

originally-filed specification of the instant application, ☐ included in a separately filed preliminary amendment for incorporation into the specification.



Information Disclosure Statement.



Attached Form 1449.



Copies of each of the references listed on the attached Form PTO-1449 are enclosed herewith.



A copy of Petition for Extension of Time as filed in the prior case.



Appended Material as follows: \_\_\_\_\_.



Return Receipt Postcard (should be specifically itemized).



Other as follows:

---

---

---

---

00/2890"42340360

## FEE CALCULATION:

- ☐ Cancel in this application original claims \_\_\_\_\_ of the prior application before calculating the filing fee. (At least one original independent claim must be retained for filing purposes.)

				SMALL ENTITY		NOT SMALL ENTITY	
				RATE	FEE	RATE	FEE
PROVISIONAL APPLICATION				\$75.00	\$	\$150.00	\$
DESIGN APPLICATION				\$155.00	\$	\$310.00	\$
UTILITY APPLICATIONS BASE FEE				\$345.00	\$	\$690.00	\$690.00
UTILITY APPLICATION; ALL CLAIMS CALCULATED AFTER ENTRY OF ALL AMENDMENTS							
		No. Filed	No. Extra				
	TOTAL CLAIMS	33 - 20 =	13	\$9 each	\$	\$18 each	\$234
	INDEP. CLAIMS	4 - 3 =	1	\$39 each	\$	\$78 each	\$78
FIRST PRESENTATION OF MULTIPLE DEPENDENT CLAIM				\$130	\$	\$260	\$
ADDITIONAL FILING FEE					\$		\$
TOTAL FILING FEE DUE					\$		\$1002

- ☒ The Commissioner is authorized to charge payment of the following fees and to refund any overpayment associated with this communication or during the pendency of this application to deposit account 19-3790. This sheet is provided in duplicate.
- ☒ The foregoing amount due.
  - ☒ Any additional filing fees required, including fees for the presentation of extra claims under 37 C.F.R. 1.16.
  - ☒ Any additional patent application processing fees under 37 C.F.R. 1.17 or 1.20(d).
  - ☐ The issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance.
- ☒ The Commissioner is hereby requested to grant an extension of time for the appropriate length of time, should one be necessary, in connection with this filing or any future filing submitted to the U.S. Patent and Trademark Office in the above-identified application during the pendency of this application. The Commissioner is further authorized to charge any fees related to any such extension of time to deposit account 19-3790. This sheet is provided in duplicate.

**SHOULD ANY DEFICIENCIES APPEAR** with respect to this application, including

deficiencies in payment of fees, missing parts of the application or otherwise, the United States Patent and Trademark Office is respectfully requested to promptly notify the undersigned.

Date: June 27, 2000



Rocco L. Adornato

Registration No. 40,480

Unisys Corporation  
Township Line & Union Meeting Roads  
P.O. Box 500  
Blue Bell, Pennsylvania 19424-0001  
Telephone: (215) 986-4111  
Facsimile: (215) 986-3090

002290 42840860

# SYSTEM AND METHOD FOR INTEGRATING WEATHER DATA INTO TELEVISION BROADCASTS

5

## BACKGROUND

10

20  
30  
40  
50  
60  
70  
80  
90  
100  
110  
120  
130  
140  
150  
160  
170  
180  
190  
200  
210  
220  
230  
240  
250  
260  
270  
280  
290  
300  
310  
320  
330  
340  
350  
360  
370  
380  
390  
400  
410  
420  
430  
440  
450  
460  
470  
480  
490  
500  
510  
520  
530  
540  
550  
560  
570  
580  
590  
600  
610  
620  
630  
640  
650  
660  
670  
680  
690  
700  
710  
720  
730  
740  
750  
760  
770  
780  
790  
800  
810  
820  
830  
840  
850  
860  
870  
880  
890  
900  
910  
920  
930  
940  
950  
960  
970  
980  
990  
1000

Television broadcast networks that cover sporting events are continually searching for ways to convey more information to the sports viewer. With ongoing advances in computer hardware and software technology, more information related to the sporting event can be sent to the viewer than ever before. When televising sports such as baseball, football, golf, and others, the weather conditions prevailing at the sporting venue can bear significantly on the outcome of the sporting event, so the home viewer will be interested in those weather conditions. For example, is the wind blowing in or out of left field at Wrigley Field when Sammy Sosa comes to bat in the ninth inning, or is the wind swirling instead so that it is coming in from right field, but going out from left field? On a cold windy December day in Buffalo, when one of the teams is driving to attempt the winning field goal, is the wind in their faces or at their backs, and how will that effect the kicker? At the British Open golf tournament, what are the wind conditions at the 9<sup>th</sup> hole, and what are the wind conditions at the 18<sup>th</sup>?

There is a pressing need in the art for a system and method for integrating weather data into television broadcasts, especially for sporting events such as those examples outlined above. With such systems and methods, the television viewer can immediately see the prevailing weather conditions at a glance, without relying on the commentators to pass that information along at their leisure.

## SUMMARY

25

The invention provides a system for integrating data representing at least one weather parameter prevailing at at least a first geographic location into a television broadcast related to the first geographic location. The system comprises at least one monitoring station located at the first geographic location, with the monitoring station including a means for sensing the weather parameter. The sensing means is adapted to generate a weather parameter signal representing the

weather parameter. The monitoring station also includes a means for transmitting the weather parameter signal from the monitoring station.

The system also comprises a base station that further includes a means for receiving the weather parameter signal from the monitoring station. This receiving means provides the weather parameter signal to rest of the base station. Means, coupled to receive the weather parameter signal from the receiving means, are provided for generating an icon signal representing a weather parameter icon in response to the weather parameter signal. The weather parameter icon represents the weather parameter sensed at the first geographic location. Means are provided for receiving an input television signal representing the television broadcast related to the first geographic location. These receiving means provide the input television signal to the base station. Finally, means are provided for merging the input television signal with the icon signal, with the merging means producing an output television signal representing the weather parameter icon superimposed on the input television signal.

#### BRIEF DESCRIPTIONS OF THE DRAWING FIGURES

Fig. 1 is a top-level diagram of an illustrative embodiment of the invention shown in an illustrative operating environment.

Fig. 2 is a block diagram of a monitoring station constructed in accordance with an illustrative embodiment of the invention as shown in Fig. 1.

Fig. 3 is a more detailed block diagram of the monitoring station constructed in accordance with an illustrative embodiment of the invention, as shown in Fig. 2.

Fig. 4 is a block diagram of a base unit constructed in accordance with an illustrative embodiment of the invention as shown in Fig. 1.

Fig. 5 is a block diagram of a monitoring station constructed in accordance with a further illustrative embodiment of the invention as shown in Fig. 1, wherein the monitoring station is adapted to sample wind direction and wind speed.

Fig. 6 is a block diagram of a system constructed in accordance with a further illustrative embodiment of the invention as shown in Fig. 1, wherein the system includes multiple monitoring stations deployed to sample weather parameters at a variety of geographic locations.



Fig. 7 is a flowchart diagram of an illustrative method of operation employed by the invention.

Fig. 8 is a block diagram of the various software components residing on the microcontroller provided as part of the remote monitoring unit constructed according to an illustrative embodiment of the invention.

Fig. 9 is a block diagram of the software running aboard the base station.

#### DETAILED DESCRIPTIONS OF ILLUSTRATIVE EMBODIMENTS

Fig. 1 is a top-level diagram of an illustrative embodiment of the invention shown in an exemplary operating environment. The invention provides a system 10 for integrating data representing at least one weather parameter 12 prevailing at at least a first geographic location into a television broadcast related to the first geographic location. The system comprises at least one monitoring station 14 located at the first geographic location, with a base station 16 located at a central location, such as in or near the “truck” that the television network uses to coordinate its broadcasting activities at a given sporting venue. For example, if a television network is covering a golf tournament, it might place cameras and announcers at each hole of the course, so the network could also place a monitoring station 14 constructed in accordance with the invention at one, several, or all of the holes in the course. As another example, a television network covering a baseball game might place cameras at various locations around the stadium, and the network might similarly place a monitoring station 14 at various locations, such as along the outfield wall. Each of these locations could be a “geographic location” in the context of this description.

The base station 16 receives as input weather parameter signals on link 26 from the monitoring station 14 and generates signals on link 27 representing a graphic icon corresponding to the signals received on link 26. In an illustrative embodiment, the base station 16 is implemented as a general purpose personal computer programmed with special-purpose software as described in further detail below. A production switcher 19, known in the art, operates to merge the graphic icon signals on link 27 with an input TV broadcast 18 to produce a TV broadcast 20 with the graphic icon signals superimposed on the television broadcast.

Fig. 2 is a block diagram of the monitoring station 14 as shown in Fig. 1. The monitoring station 14 includes a means 22 for sensing or sampling a given weather parameter 12 and for generating a weather parameter signal corresponding to the sampled weather parameter. The monitoring station 14 also includes a means 24 for transmitting the weather parameter signal from the monitoring station 14. Typically, this transmitting means 24 transforms the signal as necessary to make it suitable for transmission over distances. However, the specific means chosen for the transmitting means 24 will depend on the choice of transmission medium chosen to link the base station 16 with the one or more monitoring stations 16.

In an illustrative embodiment of the invention, a communications network 28 serves as link 26 shown in Fig. 1, and couples the transmitting means 24 of the monitoring station with the base station 16. The communications network 28 can be a cellular communications network, in which case the transmitting means 24 would be a suitable cellular modem. Alternatively, the communications network 28 can be another wireless embodiment such as a UHF radio or other RF communications network, in which case the transmitting means 24 would be a modem suitable for interfacing the monitoring station 14 with such network 28. However, if the monitoring station 14 is sufficiently close to the base station 16, or if the monitoring station 14 is intended to maintain a permanent geographic position relative to the base station 16, then it can be direct-wired via link 26 to the base station 16, as illustrated in Fig. 1. In the case, communications network 28 would include all the conductors and connectors necessary to place the base station 16 and the monitoring station 14 in communication.

One key advantage of the wireless embodiment of system 10 is the mobility provided by the base station 16 and the monitoring station 14. In an illustrative embodiment, the monitoring station 14 is constructed of lightweight components (e.g., microcontroller, modem, etc.) attached to a lightweight metal staff suitable for driving into the ground. Such an embodiment is light enough to be carried manually, and is not tethered to the base station 16, owing to the wireless implementation of communication network 28. This mobility is especially useful, for example, for a television broadcast network covering sporting events: the network personnel can arrive at a sporting venue, set up the system 10 quickly, move the monitoring station 14 easily as necessary to cover the event, and break the system 10 down quickly to move on after the sporting event concludes.

Fig. 3 is a more detailed block diagram of the monitoring station 14 constructed in accordance with an illustrative embodiment of the invention shown in Fig. 2. In an illustrative embodiment of the invention, the monitoring station 14 includes a microcontroller 30, such as an 80C552-based microcontroller as available from Tecel Company in Albuquerque, NM (www.tecel.com). Microcontroller 30 is coupled to receive the weather parameter signal 12 from the sampling means 22, and the transmitting means 24 includes a modem 32 coupled to the microcontroller 30 to transmit the weather parameter signal 12 from the monitoring station. The microcontroller 30 can be adapted to provide a user interface (not shown) to the monitoring station 14 to allow the user to adjust the operating parameters of the monitoring station 14 as necessary (sampling intervals, etc.).

Fig. 4 is a block diagram of a base unit 16 constructed in accordance with an illustrative embodiment of the invention as shown in Fig. 1. The base station 16 includes a means 34 for receiving the weather parameter signal 12 from the monitoring station 14 via communications network 28 and providing the weather parameter signal 12 to the rest of the base station 16. Typically, this receiving means 34 transforms the received signal as necessary from its transmission format to make it suitable for processing by the rest of the base station 16. However, as above, the specific means chosen for the receiving means 34 will depend on the choice of communication network 28 chosen to link the base station 16 with the one or more monitoring stations 14.

Means 36, coupled to receive the weather parameter signal from the receiving means 34, are provided for generating an icon signal representing a weather parameter icon that varies in response to the value of the weather parameter signal 12. The weather parameter icon represents the weather parameter signal 12 sampled at the first geographic location in a format that a viewer could readily recognize and assimilate. As appreciated by those skilled in the art of graphic user interfaces, the generating means 36 can be implemented by software on a specially-programmed general purpose computer to generate appropriate icons for the weather parameter signal 12.

Means 50 are provided for converting the icon signal from the generating means 36 into a television signal representing the weather parameter 12. The television signal output from converting means 50 is in a format suitable for integration into the television broadcast 20 as

ultimately produced and broadcast the viewer. Converting means 50 is discussed in more detail in connection with Fig. 9 below.

Fig. 5 is a block diagram of a monitoring station 14 constructed in accordance with a further illustrative embodiment of the invention as shown in Fig. 1, wherein the monitoring station 14 is adapted to sample illustrative weather parameters such as wind direction 42 and wind speed 44. In this embodiment, the transmitting means 24 are adapted to transmit respective signals representing the wind direction 42 and the wind speed 44 over communication network 28 to the base station 16. Those skilled in the art will recognize that this function can be realized by time-multiplexing both signals over a shared transmitting means 24 or by providing separate transmitting means dedicated to each signal. In this illustrative embodiment, the generating means 36 is responsive to the wind direction signal 42 to create a wind direction icon signal representing a wind direction icon, and is responsive to the wind speed signal 44 to create a wind speed icon signal representing a wind speed icon. For example, the generating means 36 can be adapted to create a wind direction icon signal representing a wind direction icon that has a directional orientation that varies in response to the wind direction signal 42, although other suitable icons may be appreciated by those skilled in the art. Similarly, the generating means 36 can be adapted to create a wind speed icon signal representing a wind speed icon having a physical characteristic that varies in response to the wind speed signal 44. For example, the wind speed icon could be a numerical readout, a bar graph, etc.

In an illustrative embodiment of the invention, the sampling means 22 in Figs. 2 and 3 includes a means 46 for sensing a wind direction 42 prevailing at the first geographic location and for generating a wind direction signal on link 50 representing that prevailing wind direction. One device suitable for the wind direction sensing means 46 is a wind vane. Continuing the illustrative embodiment of the invention, the sampling means 22 includes a means 48 for sensing a wind speed prevailing at the first geographic location and for generating a wind speed signal on link 52 representing the wind speed 44. One device suitable for the wind speed sensing means 48 is an anemometer.

Returning to Fig. 4, production switcher 19 receives an input television signal 18 representing the television broadcast related to a first geographic location monitored by a first one of the monitoring stations 14. As known in the art, this input television signal 18 is typically

captured by a television camera or other suitable camera positioned proximate the first geographic location. production switcher 19 merges the input television signal 18 with the output signals representing the weather parameter icon(s) from the generating means 36. The production switcher 19 produces an output television signal 20 representing the weather parameter icon superimposed on the input television signal 18, resulting in a television broadcast 20 related to the first geographic location with the weather parameter icon appearing on the broadcast as perceived by the viewer.

In another illustrative embodiment, base station 16 and production switcher 19 can be adapted to merge an additional icon with the broadcast signal 18, such as an icon for an advertiser's logo or the like arranged to be on the viewing screen proximate the weather-related icons. Since the viewer's attention will be drawn to the weather-related icon(s), advertising space near icon(s) likely will sell at a premium. Signals representing the advertising or other icon can be merged into the output television signal 20 in the same manner as the signals representing the weather-related icons.

Fig. 6 is a block diagram of a system constructed in accordance with a further illustrative embodiment of the invention as shown in Fig. 1, wherein the system includes multiple monitoring stations deployed to sample weather parameters at a variety of geographic locations. As discussed above, the television broadcast network covering, for example, a sporting event might deploy a plurality of the monitoring stations as necessary to cover the sporting event. In this event, at least a second monitoring station is located at a second geographic location related to the broadcast. For example, the broadcast network might deploy a monitoring station at each hole of a golf course hosting a televised golf tournament. Any additional monitoring stations are substantially identical to the monitoring station 14 already disclosed above, and include similar elements.

Continuing with Fig. 6, the base station 16 is adapted to operate with the additional monitoring station 14b. Specifically, the means 34 (Fig. 5) for receiving the weather parameter signals 12a and 12b from the monitoring stations 14a and 14b is adapted as necessary to receive the additional weather parameter signal 12b from the additional monitoring station 14b. Those skilled in the art will recognize that this function can be realized by having the base station periodically poll each monitoring station 14a and 14b and receive the weather parameter signals

12a and 12b over a shared receiving means 34 in a time-multiplexed manner; alternatively, a separate receiving means 34 can be dedicated to each monitoring unit 14a and 14b. The means 36 for generating the signal representing the weather parameter icon is responsive to the additional weather parameter signal 12b to create an additional weather parameter icon signal representing an additional weather parameter icon representing the weather parameter prevailing at the additional geographic location. It should be understood that the embodiment illustrated in Fig. 6 can be readily adapted to sample not only weather parameters 12a and 12b generally, but also wind direction 42 and wind speed 44 specifically, as illustrated and discussed in connection with Fig. 5 above.

Television signals 18a and 18b are similar to signal 18 discussed above, but signals 18a and 18b are associated with separate geographic locations, such as different holes at a golf course. The production switcher 19 is adapted to receive the additional television broadcast signal 18b related to the additional geographic location, and is adapted to merge the additional television broadcast signal 18b with the additional weather parameter icon signals representing the weather parameter(s) 12b sampled by monitoring station 14b. Thus, the production switcher 19 is adapted to produce output signals 20a and 20b, with output signal 20a representing the weather parameter 12a superimposed on broadcast signal 18a, and output signal 20b representing the weather parameter 12b superimposed on broadcast signal 18b.

Fig. 8 is a block diagram of the various software components residing on the microcontroller 30. The microcontroller 30 provides Instrument Interface Interrupt Logic 92 for servicing interrupts generated by the instruments provided as sampling means 22, such as wind vanes and anemometers. The software running on microcontroller 30 also provides appropriate Interrupt Service Routines (ISRs) to configure the sampling means 22 and to retrieve sampled data from sampling means 22, as recognized and understood by those skilled in the art. Operator ready switch logic 94 allows the user to configure and program the microcontroller 30, such as to enter sampling parameters. Sample data block 96 serves to receive, store, buffer, and transmit data sampled by the sampling means 22, and is responsive to the programming entered by the user through the Operator ready switch logic 94. The Serial Communications Protocol Interrupt Logic 98 functions to coordinate and execute the serial communication of the sampled data from the microcontroller 30 to the base station 16. Specifically, Serial Communications Protocol Interrupt Logic 98 services all interrupts involved with the serial communication between the

microcontroller 30 and the base station 16. A radio modem embodiment 32 of transmitting means 24 is coupled to the microcontroller 30 to communicate serially with the base station 16. A suitable radio modem 32 is the TS4000 by Teledesign Systems ([www.teledesignsystems.com](http://www.teledesignsystems.com)). However, those skilled in the art will recognize that other radio modems are available and may be appropriate in certain applications.

Fig. 9 is a block diagram of the software running aboard the base station 16. At the base station 16, a radio modem embodiment 32 of receiving means 34 is coupled to communicate with the monitoring station 14 to communicate serially with the microcontroller 30. The radio modem 32 passes the transmitted data on to Multi-Point Serial Communications Protocol logic 82, which functions to coordinate and execute the serial communication between the base station 16 and each one of the microcontrollers 30 provided by the several monitoring stations 14. The Protocol logic 82 is based on a poll-select protocol developed by Burroughs that uses the following format: start-byte, address, sequence, command, data, and block-check. This Burroughs protocol is especially suitable because of its efficient use of the relatively limited bandwidth of the radio modems 32. Note that the radio modems 32 may also offer their own multi-point protocol, but these protocols may entail excessive overhead.

The Remote Sample Data areas 84a, 84b, and 84c are buffers for storing the data sampled by and received from respective ones of the monitoring stations 14. One Remote Sample Data area 84a, 84b, or 84c is provided for each monitoring station 14 provided by system 10.

The software running on the base station 16 also provides an Operator Interface block 85 that enables the user selectively to display the status of the various monitoring stations 14, to select a specific monitoring station 14 for sampling, and to select a graphic to be used to display the data from the selected monitoring station 14. The Operator interface block 85 provides at least one remote status window 86a, 86b, or 86c, one for each monitoring station 14 provided by system 10. Each remote status window 86a, 86b, or 86c displays to the user the operating status and/or the data sampled by the monitoring station 14 with which it is associated. The Operator interface subsection 87 allows the operator to set the graphic parameters that control where the icons representing the sampled data will be displayed (left corner, right corner, logo, no logo, distance numbers, etc.). The operator interface block 85 generates output control signals

controlling which monitoring station 14 is to be sampled and displayed, and which graphics are to be used to display the data sampled from the selected monitoring station 14.

The Graphics Presentation/Continuous Update Logic 89 receives data signals from the Remote Sample Data areas 86a, 86b, and 86c, and receives control signals from the operator interface subsection 87. After selecting a monitoring station 14 and setting the graphic parameters as described above, the user activates an "execute" or similar button to cause the Graphics Presentation/Continuous Update logic 89 to combine the operator input with the sampled data from the selected monitoring station 14. The Graphics Presentation portion of the logic then generates a display of the resulting graphic. The Continuous Update portion of the logic generates control signals to the Multi-Point Serial Communications Protocol logic 82 to re-sample or refresh the data sampled from the monitoring station 14 as necessary to provide the viewer with an up-to-the-minute display of weather or wind conditions, in near-real-time. The Graphics Presentation/Continuous Update Logic 89 provides output data signals to a converting means 50, such as a graphic frame buffer card, and generates control signals to the converting means 50 and to the Multi-Point Serial Communications Protocol logic 82.

The test patterns module 88 is responsive to control signals from the operator interface bock 85 to generate test signals that are passed as control signals to the Graphics Presentation/Continuous Update Logic 89. Such test signals can be useful for debugging or diagnosing problems with the system 10, as recognized by those skilled in the art.

The graphic frame buffer card, serving as converting means 50, receives both data and control signals from the Graphics Presentation/Continuous Update Logic 82. A suitable card and driver software are available from Matrox, Inc. ([www.matrox.com](http://www.matrox.com)), such as their "DigiMix" model featured at <http://www.videotextsystems.com/MatroxDigiMix.htm>. However, other graphics cards may be available and may be suitable in certain applications.

In an illustrative embodiment of the invention, an additional drawing/captioning language layer 81 resides between the software on the base station 16 and the graphics card 50 that enables the software to specify abstract graphics parameters rather than requiring the software to manipulate pixels directly to effect the desired graphics. For example, using such a drawing/captioning language layer 81 would enable the software to specify "put '2.5 MPH' in the 'Banker' font with anti-aliasing at coordinate (85,421)" instead of having to do perform pixel by



pixel manipulations. Suitable drawing/captioning software 81 is the RTX product available from Inscriber Technologies (www.inscriber.com). RTX provides a type of character generator utility that interprets a drawing/captioning command language into pixels on a memory bitmap.

However, other similar software packages may be available and may be suitable in certain applications to implement drawing/captioning language layer 81. In certain applications, it may be desirable to forego implementation of drawing/captioning language layer 81 in favor of direct pixel manipulation.

From this pixels-in-memory bitmap, the frame buffer card 50 generates NTSC (in North America and Japan; otherwise PAL) standard video and key, synchronized to a common sync signal. The frame buffer card 50 converts pixels stored in memory into a standard video synchronized waveform, and provides this waveform as output. This waveform output is routed to the production switcher 19 in the main control room, which superimposes the waveform output over the TV broadcast signal at the command of the director. The production switcher 19 also switches between camera shots, fades to black, etc. The production switcher 19 is known in the art and the system 10 constructed according to the invention generates input to the production switcher 19.

#### Method of Operation

Fig. 7 is a flowchart diagram of an illustrative method of operation employed by the invention. The invention provides a method for integrating data representing a wind direction and a wind speed prevailing at at least a first geographic location into a television broadcast related to the first geographic location. In an illustrative embodiment of the invention, the method comprises the following steps. The wind direction and a wind speed prevailing at the first geographic location is sensed or sampled. Respective signals representing the wind direction and the wind speed are generated. These respective signals representing the wind direction and the wind speed are transmitted and received. A wind speed icon signal representing a wind speed icon corresponding to the wind speed signal generated, along with a wind direction icon signal representing a wind direction icon corresponding to the wind direction signal. An input television signal representing the television broadcast related to the first geographic location is received. The input television signal is merged with the wind speed icon signal and

the wind direction icon signal so that the wind speed icon and the wind direction icon are superimposed on the television broadcast related to the first geographic location.

In an illustrative embodiment of the invention, the method further comprises the following steps involved with operating at least a second monitoring station within the system.

- 5 A further wind direction and a further wind speed prevailing are sensed at a further geographic location. Further respective signals representing the further wind direction and the further wind speed are generated, and these further respective signals representing the further wind direction and the further wind speed are transmitted to the base station. These further respective signals representing the further wind direction and the further wind speed are received at the base
- 10 station. The base station generates a further wind speed icon signal representing a further wind speed icon corresponding to the further wind speed signal, and a further wind direction icon signal representing a further wind direction icon corresponding to the further wind direction signal. The bases station also receives a further input television signal representing a further television broadcast related to a further geographic location. Finally, the base station merges the
- 15 further input television signal with the further wind speed icon signal and the further wind direction icon signal so that the further wind speed icon and the further wind direction icon are superimposed on the further television broadcast related to the further geographic location.

It is understood that changes may be made to the illustrative embodiments described above without departing from the broad inventive concepts thereof. Accordingly, the present

20 invention is not limited to the particular illustrative embodiments disclosed, but is intended to cover all modifications that are within the spirit and scope of the invention as defined by the appended claims.

I claim:

1. A system for integrating data representing at least one weather parameter prevailing at at least a first geographic location into a television broadcast related to the first geographic location, the system comprising:

5 at least one monitoring station located at the first geographic location, the monitoring station including:

means for sensing the weather parameter, the sensing means being adapted to generate a weather parameter signal representing the weather parameter; and means for transmitting the weather parameter signal from the monitoring station;

10 a base station including:

means for receiving the weather parameter signal from the monitoring station and providing the weather parameter signal to the base station;

means for generating an icon signal representing a weather parameter icon in response to the weather parameter signal, the weather parameter icon representing the weather parameter sensed at the first geographic location; and

means for converting the icon signal into a television signal representing the weather parameter, the television signal being in a format suitable for integration into the television broadcast.

20 2. The system of claim 1, wherein the sensing means includes means for sensing a wind direction prevailing at the first geographic location and for generating a wind direction signal representing the wind direction.

3. The system of claim 2, wherein the wind direction sensing means is a wind vane.

25 4. The system of claim 1, wherein the sensing means includes means for sensing a wind speed prevailing at the first geographic location and for generating a wind speed signal representing the wind speed.

5. The system of claim 4, wherein the wind speed sensing means is an anemometer.

6. The system of claim 1, wherein the monitoring station includes a microcontroller coupled to receive the weather parameter signal from the sensing means, and wherein the transmitting means includes a modem coupled to the microcontroller to transmit the wind direction signal from the monitoring station.

5 7. The system of claim 1, wherein the means for receiving the weather parameter signal is a modem coupled to communicate with the monitoring station.

8. The system of claim 2, wherein the generating means is responsive to the wind direction signal to create a wind direction icon signal representing a wind direction icon.

9. The system of claim 4, wherein the generating means is responsive to the wind speed  
10 signal to create a wind speed icon signal representing a wind speed icon.

10. The system of claim 1, further comprising means for merging the icon signal with an input television signal representing the television broadcast related to the first geographic location, the merging means producing an output television signal representing the weather parameter icon superimposed on the input television signal.

11. A system for integrating data representing a wind direction and a wind speed prevailing at at least a first geographic location into a television broadcast related to the first geographic location, the system comprising:

at least one monitoring station located at the first geographic location, the monitoring station including:

means for sensing the wind direction prevailing at the first geographic location, the wind direction sensing means being adapted to generate a wind direction signal;

means for sensing the wind speed prevailing at the first geographic location, the wind speed sensing means being adapted to generate a wind speed signal; and

means for transmitting the wind speed signal and the wind direction signal from the monitoring station;

a base station including:

means for receiving the wind speed signal and the wind direction signal from the monitoring station and providing the wind speed and wind direction signals to the base station;

means, responsive to the wind speed signal, for generating a wind speed icon signal representing a wind speed icon, the wind speed icon representing the wind speed prevailing at the first geographic location;

means, responsive to the wind direction signal, for generating a wind direction icon signal representing a wind direction icon, the wind direction icon representing the wind direction prevailing at the first geographic location; and

means for converting the wind speed icon signal and the wind direction icon signal into respective television signals representing the wind direction and the wind speed, the television signal being in a format suitable for integration into the television broadcast.

12. The system of claim 11, further comprising means for merging an input television signal with the wind direction icon signal and the wind speed icon signal, the merging means producing an output signal representing the wind speed icon and the wind direction icon superimposed on the television broadcast.

13. The system of claim 11, further comprising at least a further monitoring station located at a further geographic location, the second monitoring station including:

further means for sensing a further wind direction prevailing at the further geographic location, the further wind direction sensing means being adapted to generate a further wind direction signal;

further means for sensing a further wind speed prevailing at the further geographic location, the further wind speed sensing means being adapted to generate a further wind speed signal; and

further means for transmitting the further wind speed signal and the further wind direction signal from the further monitoring station.

14. The system of claim 13, wherein:

the means for receiving the wind speed signal and the wind direction signal from the monitoring station is adapted to receive the further wind speed signal and the further wind direction signal from the further monitoring station;

the means for generating the wind speed icon signal is responsive to the further wind speed signal to create a further wind speed icon signal representing a further wind speed icon, the further wind speed icon representing the further wind speed prevailing at the further geographic location;

the means for generating the wind direction icon signal is responsive to the further wind direction signal to create a further wind direction icon signal representing a further wind direction icon, the further wind direction icon representing the further wind direction prevailing at the further geographic location;

the means for receiving the input television signal is adapted to receive a further television broadcast related to the further geographic location; and

the merging means are adapted to merge the further television broadcast with the further wind direction icon signal and the further wind speed icon signal, the merging means producing a further output signal representing the further wind speed icon and the further wind direction icon superimposed on the further television broadcast.

15. The system of claim 11, wherein the means for generating the wind direction icon signal is adapted to create a wind direction icon signal representing a wind direction icon having an orientation that varies in response to the wind direction signal.

16. The system of claim 11, wherein the means for generating the wind speed icon signal is adapted to create a wind speed icon signal representing a wind speed icon having a physical characteristic that varies in response to the wind speed signal.

17. The system of claim 11, further comprising a communications network coupling the transmitting means of the monitoring station with the wind speed and wind direction receiving means of the base station.

18. The system of claim 17, wherein the communications network is a cellular communications network.

19. The system of claim 17, wherein the communications network is a UHF radio communications network.

5 20. The system of claim 11, wherein the wind speed sensing means is an anemometer.

21. The system of claim 11, wherein the wind direction sensing means is a wind vane.

22. The system of claim 11, wherein the transmitting means is a modem.

23. The system of claim 11, further comprising a microcontroller coupled to the wind direction and wind speed sensing means and the transmitting means to control the operation of both.

24. The system of claim 23, wherein the microcontroller is adapted to provide a user interface to the monitoring station.

25. The system of claim 11, wherein the means for receiving the wind speed signal and the wind direction signal is a modem.

15 26. The system of claim 11, wherein the icon generating means is a specially-programmed general purpose computer.

27. The system of claim 11, wherein the television signal receiving means is a graphics interface card.

20 28. The system of claim 11, wherein the merging means is a specially-programmed general purpose computer.

29. A system for integrating data representing a wind direction and a wind speed prevailing at at least a first geographic location into a television broadcast related to the first geographic location, the system comprising:

at least one monitoring station located at the geographic location, the monitoring station including:

an anemometer adapted to sense the wind speed prevailing at the first geographic location and to generate a wind speed signal representing the wind speed;

a wind vane adapted to sense the wind direction prevailing at the first geographic location and to generate a wind direction signal representing the wind direction; and

a first modem coupled to the anemometer and the wind vane to receive the wind direction signal and the wind speed signal and adapted to transmit the wind direction signal and the wind speed signal from the monitoring station;

a base station including:

at least one further modem communicating with the first modem to receive the wind direction signal and the wind speed signal from the monitoring station;

a graphics interface card coupled to receive an input television signal representing the television broadcast; and

a computer being coupled to the further modem and being programmed to create a wind direction icon signal representing a wind direction icon in response to the wind direction signal and a wind speed icon signal representing a wind speed icon in response to the wind speed signal, the computer being coupled to the graphics interface card and being programmed to merge the input television signal from the graphics interface card with the wind direction icon signal and a wind speed icon signal so that the wind direction icon and the wind speed icon are superimposed on the television broadcast.

30. The system of claim 29, further comprising at least a further monitoring station located at a further geographic location, the further monitoring station including:

a further anemometer adapted to sense a further wind speed prevailing at the further geographic location and to generate a further wind speed signal representing the further wind speed;

a further wind vane adapted to sense a further wind direction prevailing at the further geographic location and to generate a further wind direction signal representing the further wind direction; and

a third modem coupled to the further anemometer and the further wind vane to receive the further wind direction signal and the further wind speed signal and



being adapted to transmit the further wind direction signal and the further wind speed signal from the further monitoring station.

31. A method for integrating data representing a weather parameter prevailing at at least a first geographic location into a television broadcast related to the first geographic location, the method comprising the steps of:

sampling the weather parameter prevailing at the first geographic location;  
generating at least one signal representing the weather parameter;  
communicating the signal from the first geographic location;  
generating a graphic icon signal representing a graphic icon representing the weather parameter signal;  
receiving an input television signal representing the television broadcast related to the first geographic location; and  
merging the input television signal with the graphic icon signal so that the weather parameter icon is superimposed on the television broadcast related to the first geographic location.

32. The method of claim 31, wherein the step of:

sampling the weather parameter includes sampling at least one of a wind speed and a wind direction prevailing at the first geographic location;  
generating at least one signal includes generating a respective signal representing at least one of the wind speed and the wind direction;  
communicating the signal includes communicating at least the respective signal;

generating a graphic icon signal includes generating a respective graphic icon signal representing respective icons corresponding to the wind direction and the wind speed;  
and

merging the input television signal includes merging the respective graphic icon signal with the input television signal.

33. The method of claim 31, further comprising the steps of:

sensing a further wind direction and a further wind speed prevailing at a further geographic location;

generating further respective signals representing the further wind direction and the further wind speed;

5 transmitting the further respective signals representing the further wind direction and the further wind speed;

receiving the further respective signals representing the further wind direction and the further wind speed;

10 generating a further wind speed icon signal representing a further wind speed icon corresponding to the further wind speed signal, and a further wind direction icon signal representing a further wind direction icon corresponding to the further wind direction signal;

receiving a further input television signal representing a further television broadcast related to a further geographic location; and

15 merging the further input television signal with the further wind speed icon signal and the further wind direction icon signal so that the further wind speed icon and the further wind direction icon are superimposed on the further television broadcast related to the further geographic location.

## ABSTRACT

A system and method for integrating data representing at least one weather parameter prevailing at at least a first geographic location into a television broadcast related to the first geographic location. The system includes at least one monitoring station located at the first geographic location, with the monitoring station including apparatus for sensing the weather parameter. The sensing apparatus is adapted to generate a weather parameter signal representing the weather parameter. The monitoring station also includes apparatus for transmitting the weather parameter signal from the monitoring station. The system also includes a base station that further includes apparatus for receiving the weather parameter signal from the monitoring station. This receiving apparatus provides the weather parameter signal to rest of the base station. Apparatus, coupled to receive the weather parameter signal from the receiving apparatus, are provided for generating an icon signal representing a weather parameter icon in response to the weather parameter signal. The weather parameter icon represents the weather parameter sensed at the first geographic location. Apparatus is provided for receiving an input television signal representing the television broadcast related to the first geographic location. These receiving apparatus provide the input television signal to the base station. Finally, apparatus is provided for merging the input television signal with the icon signal, with the merging apparatus producing an output television signal representing the weather parameter icon superimposed on the input television signal.

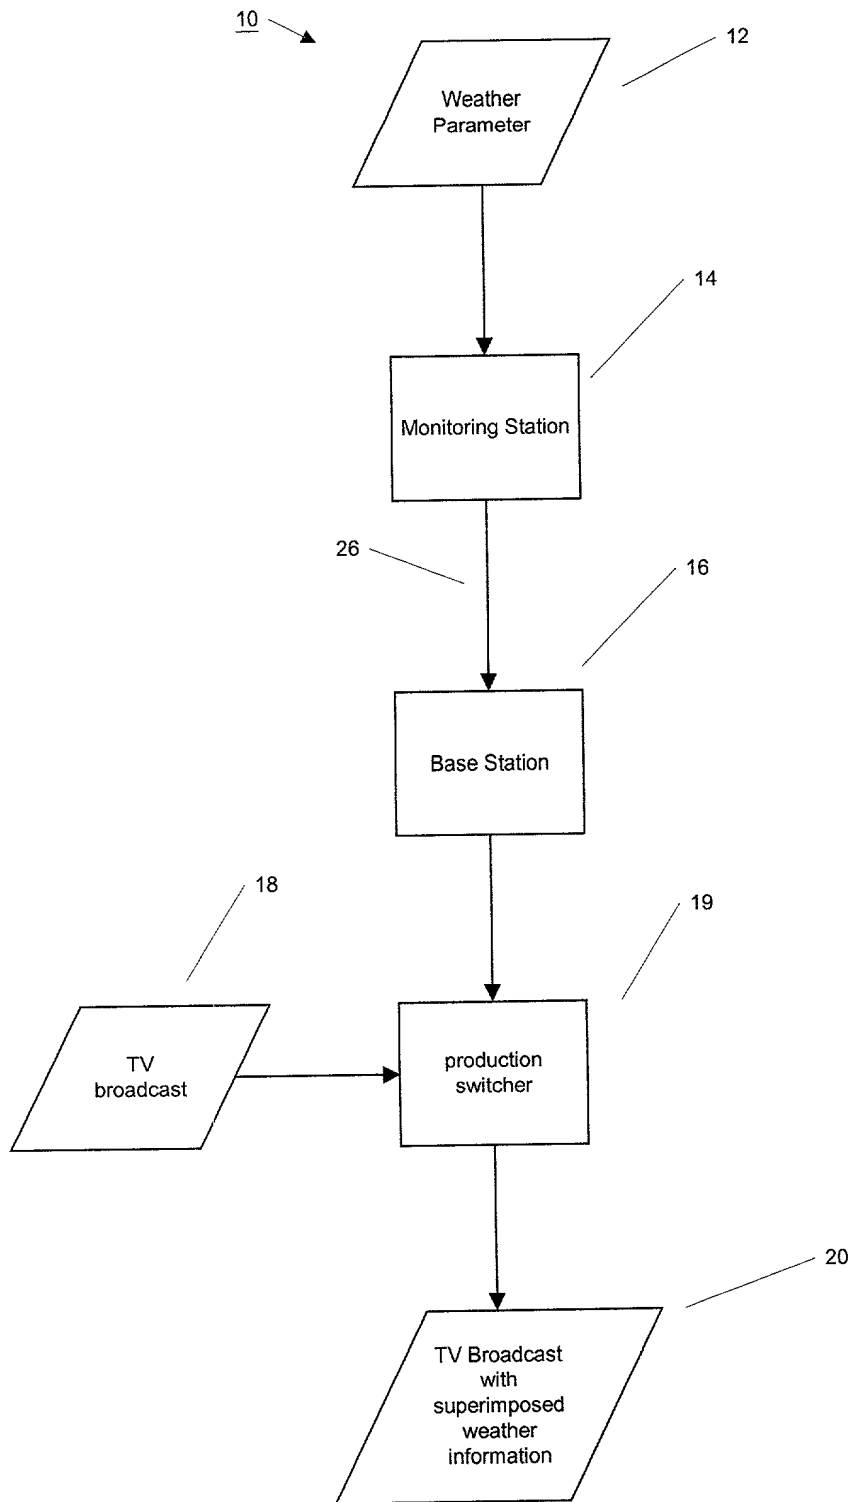


Fig. 1

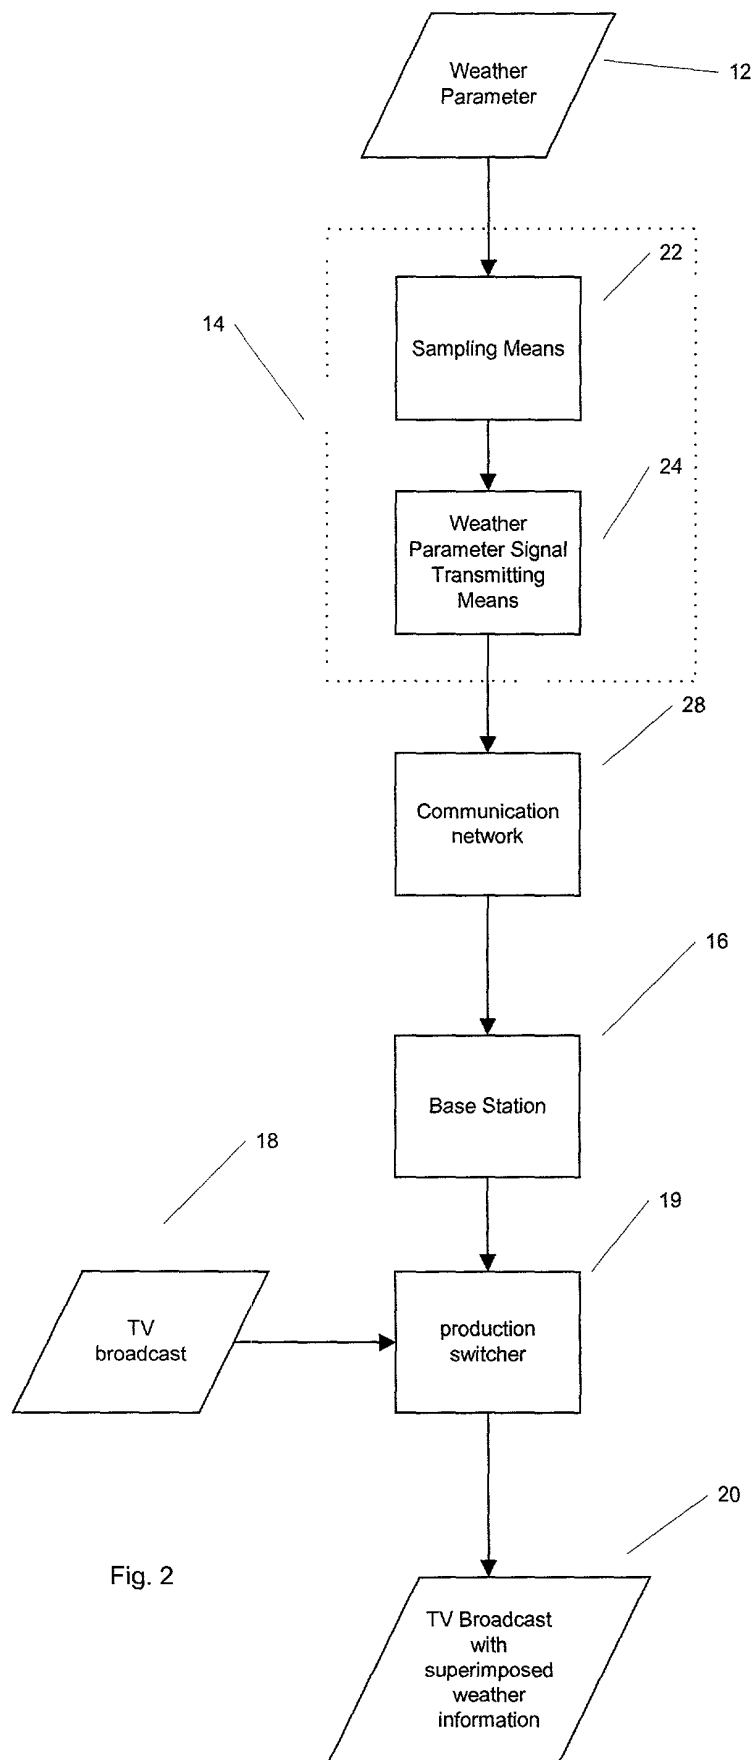


Fig. 2

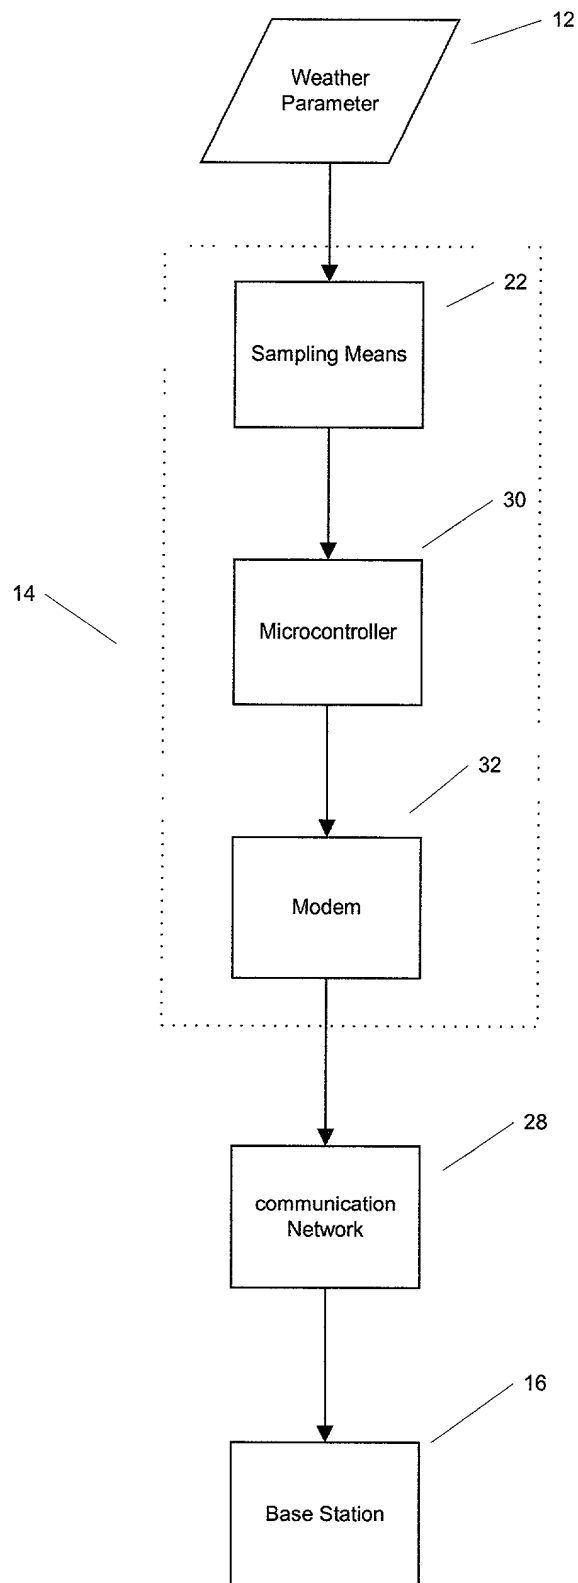


Fig. 3







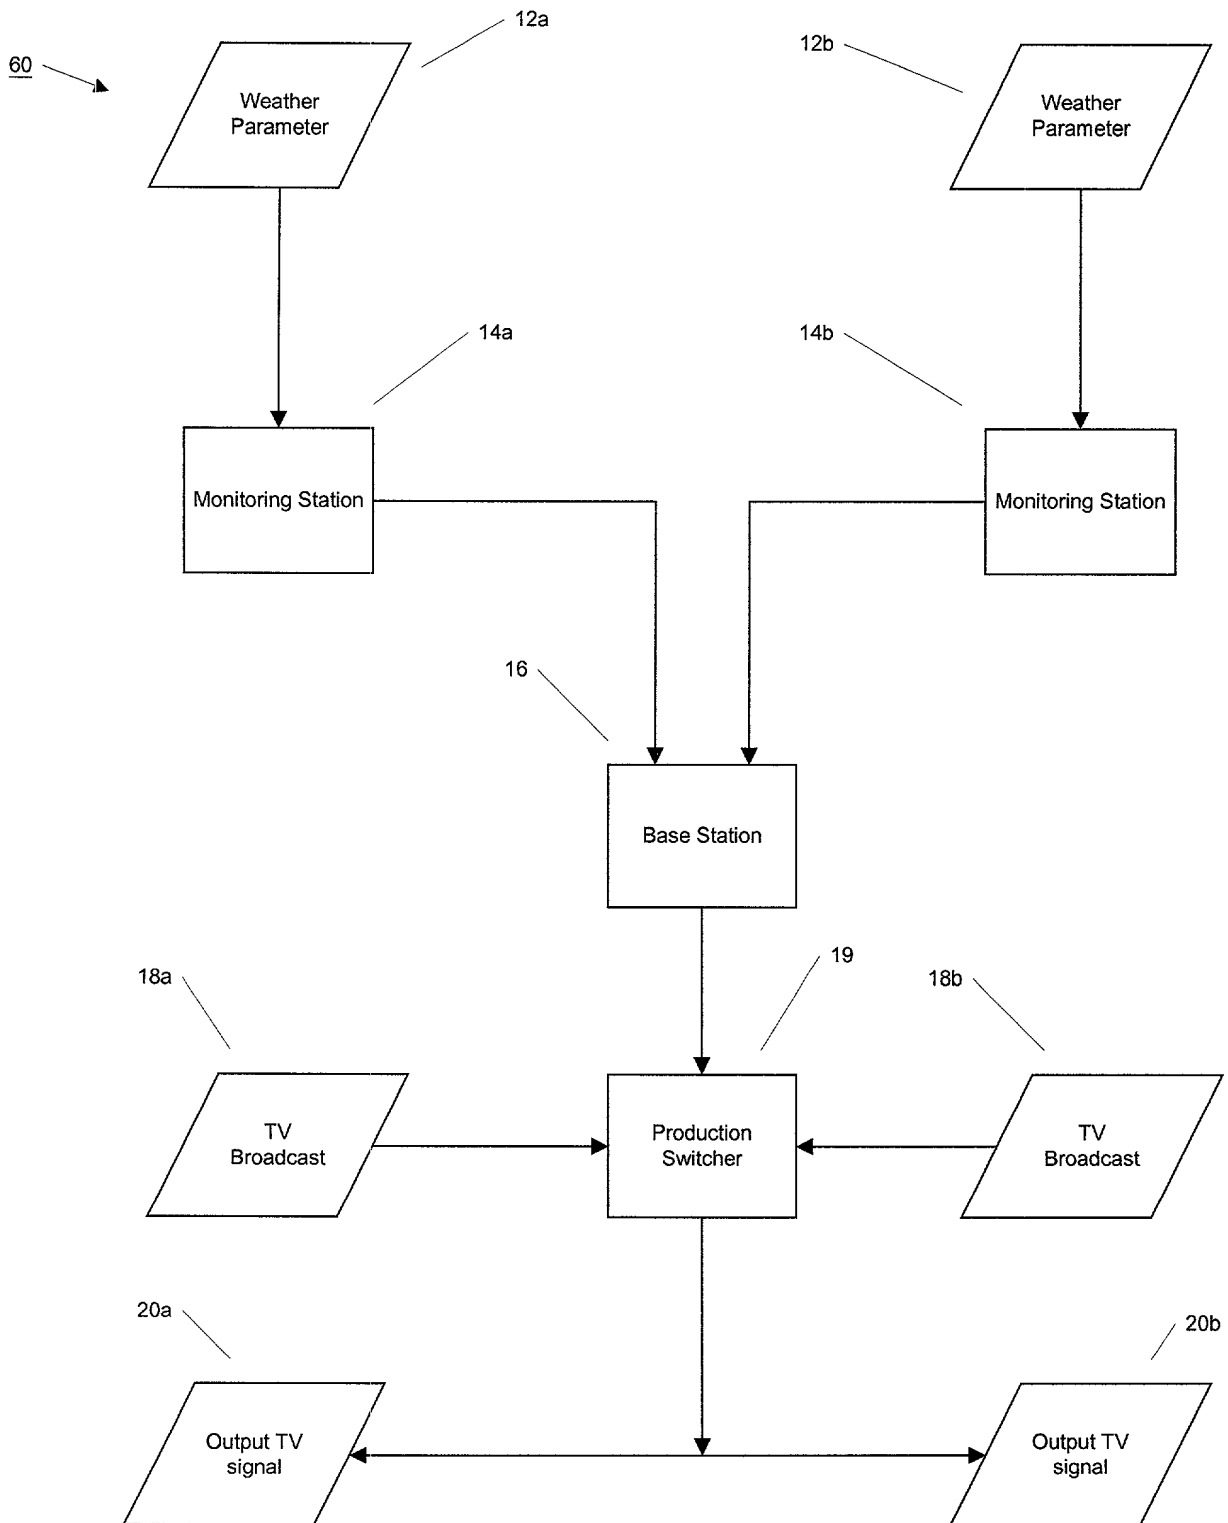


Fig. 6

Fig. 7

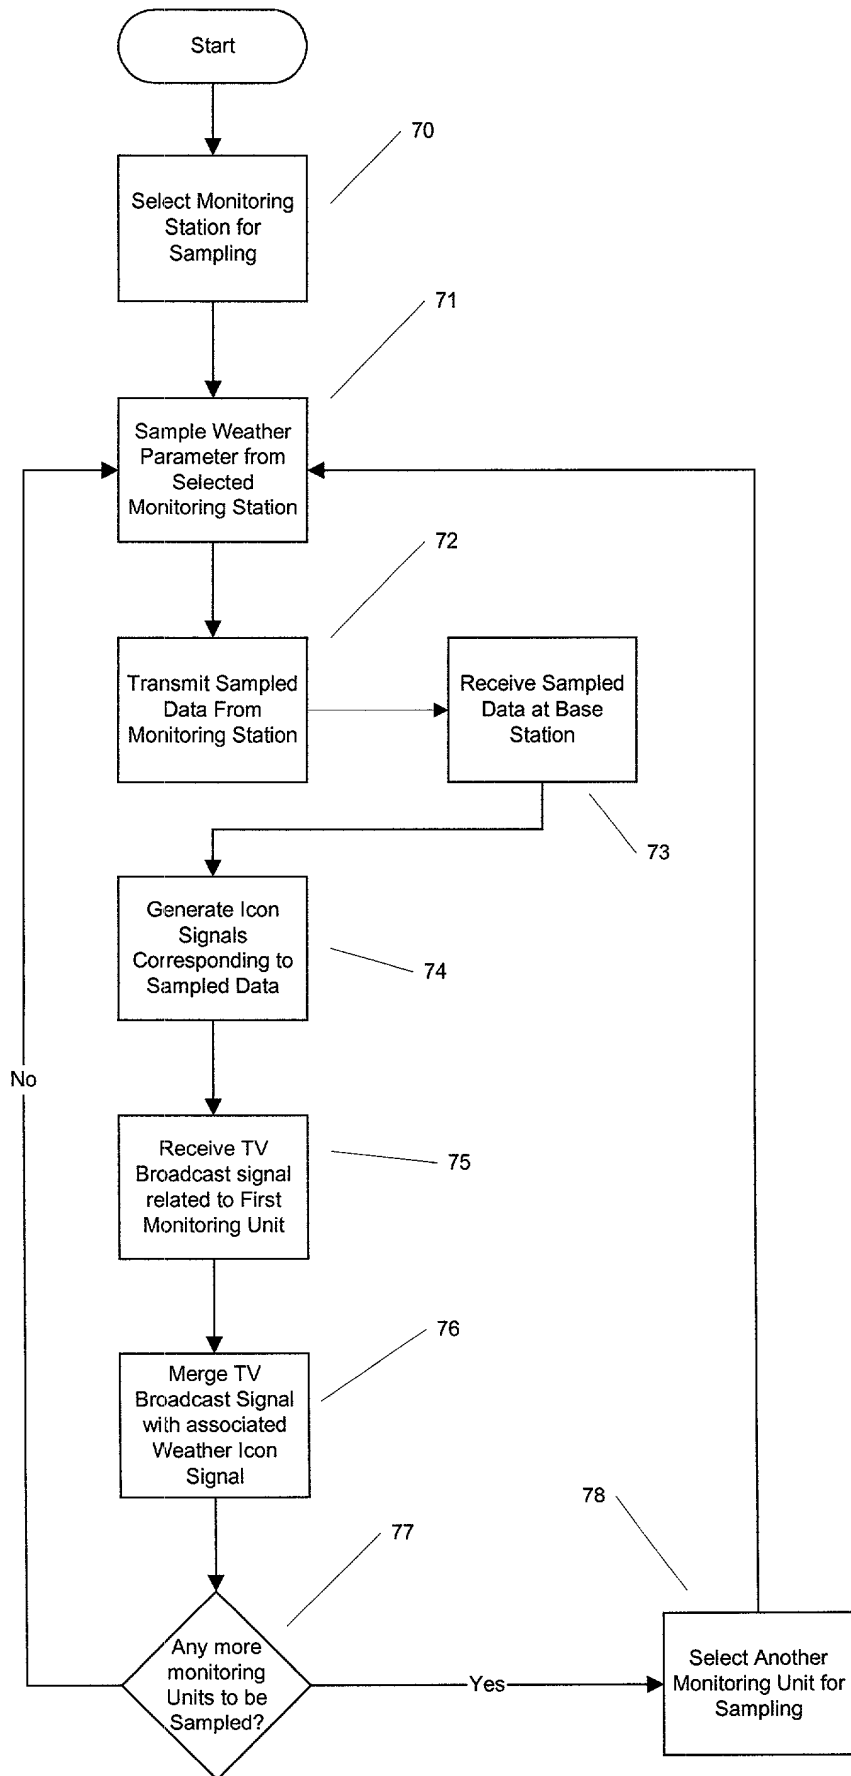


Fig. 8

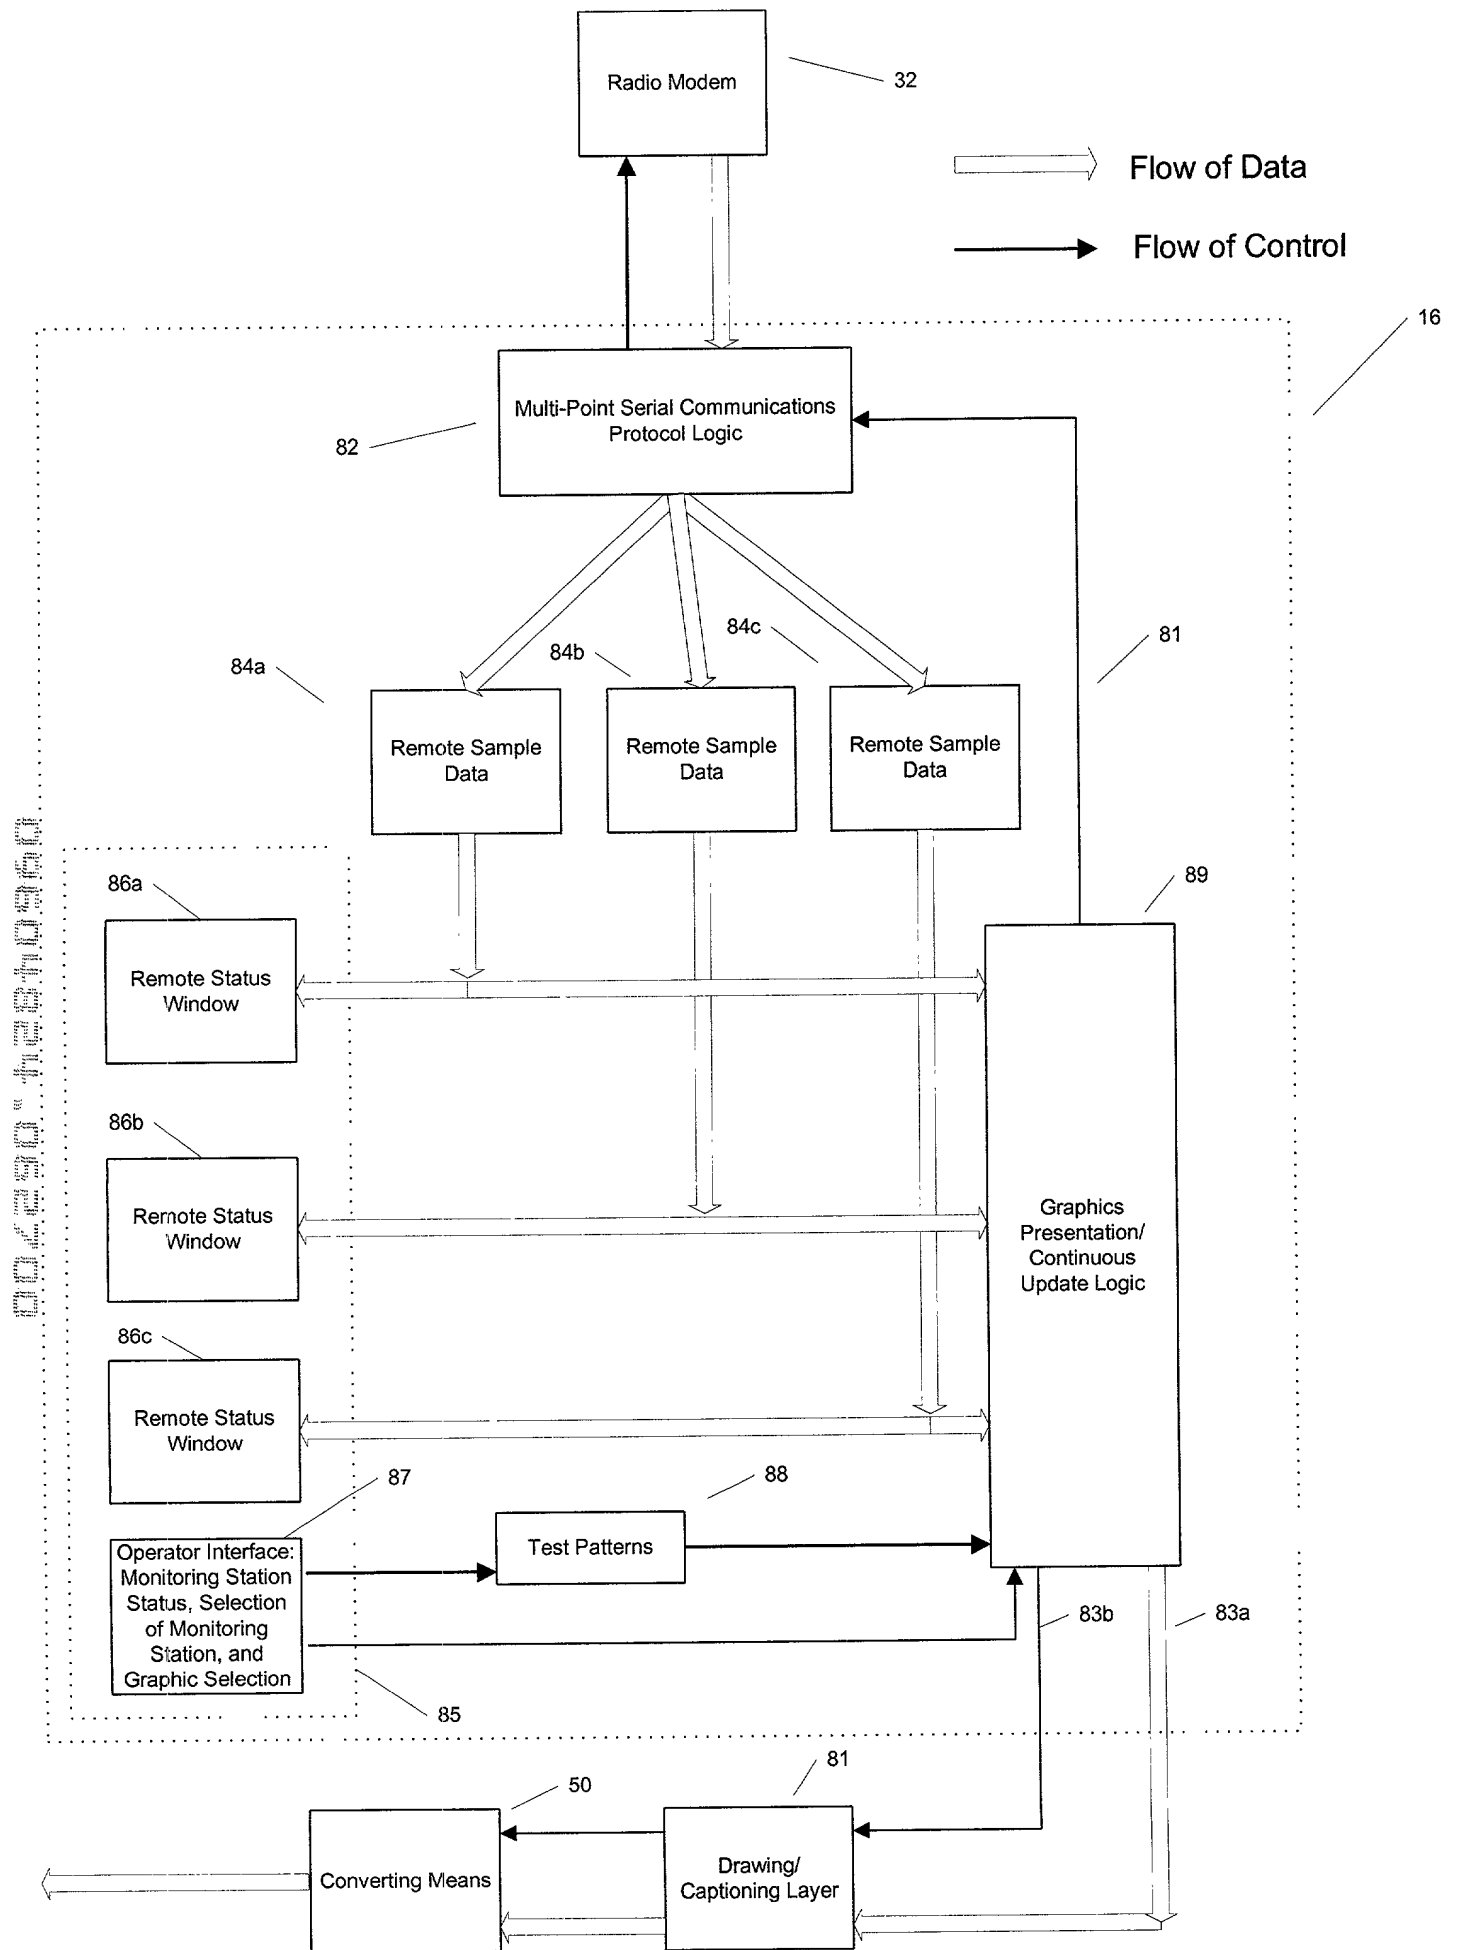


Fig. 9

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

## In Re Application of:

Jeffrey C. Schroeder

Group Art Unit: N/A

Examiner: N/A

For: **SYSTEM AND METHOD FOR  
INTEGRATING WEATHER DATA  
INTO TELEVISION BROADCASTS**

## DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; and

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a



Utility Patent



Design Patent

is sought on the invention, whose title appears above, the specification of which:



is attached hereto.



was filed on \_\_\_\_\_ as Serial No. \_\_\_\_\_



said application having been amended on \_\_\_\_\_

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to be material to the patentability of this application in accordance with 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a-d) of any **foreign application(s)** for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of

any application on which priority is claimed:

Priority Claimed (If X'd)	Country	Serial Number	Date Filed
<input type="checkbox"/>	_____	_____	_____
<input type="checkbox"/>	_____	_____	_____

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to be material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Serial Number	Date Filed	Patented/Pending/Abandoned
_____	_____	_____
_____	_____	_____

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:

Serial Number	Date Filed
<u>60/197,704</u>	<u>April 18, 2000</u>
_____	_____

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: **Rocco L. Adornato** and **Mark T. Starr**, Registration Nos. **40,480** and **28,762** respectively of UNISYS Corporation, Township Line and Union Meeting Roads, Blue Bell, Pennsylvania, 19424.

Address all telephone calls and correspondence to:

**Rocco L. Adornato**  
**UNISYS Corporation**  
Township Line & Union Meeting Roads  
Blue Bell, PA 19424  
Telephone No. **215-986-4111**.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name:	
Jeffrey C. Schroeder	
Mailing Address:	Signature _____
3028 Ranchette Square Gulf Breeze, Florida 32561-2612	Date of Signature: _____
City/State of Actual Residence:	Citizenship: _____
Gulf Breeze, Florida	